


P-80

Revision 2

Page 2

04-15-2009

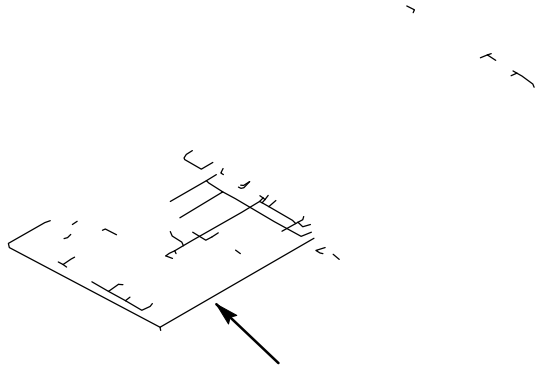

3.4 PACKING

- 3.4.1 Pack any number of intermediate containers uniformly into each shipping container.
- 3.4.2 Shipping containers as packed, shall protect each item and package during ordinary handling and shipping and shall meet the minimum requirements of the common carriers for acceptance for safe transportation at the lowest rate to the point of delivery.
- 3.4.3 Intermediate containers which meet the requirements of Paragraph 3.4.2 may be used as shipping containers.
- 3.4.4 Enclose or attach a copy of packing slip to the shipping container.

■ 3.5 MARKING (Unless otherwise specified in the contract or Purchasing Document use the following criteria)

3.5.1 Unit Package Marking

Unless otherwise specified, apply pressure-sensitive label(s) to each individual package, blister segment, etc. Marking shall be clear and legible.

Label must show part number per contracting document, manufacturer's name (may be abbreviated but logo is not acceptable), lot date code (LDC) if applicable. Additional markings may be specified in the item detail specification, drawing or purchase order.

Apply special labels as applicable, i.e., "Thermal Control" per P-201, "Protected with Tarnish Inhibitor – Do Not Open Until Ready for Use or Inspection," "Electrostatic CAUTION," etc.

3.5.1.1 . When loose contact pins are furnished with connector(s) the unit package marking shall include the part number(s) of the contact pins.

3.5.1.2 . If specified markings are readily visible and legible on each part through the unopened unit packages, the labeling or marking requirement is waived on the unit package.

3.5.2 Electrostatic CAUTION Label

Apply WARNING label (Figure 3) to each unit package containing a static sensitive device.

P-80

Revision 2

Page 4

04-15-2009

3.5.4 Shipping Container Marking